

Safe ownership is your responsibility. Please thoroughly read and understand this manual before loading your firearm.

Keep firearms and ammunition away from children. Lock unloaded firearms and ammunition securely in separate locations.

Savage Arms recommends the use of good quality high velocity factory manufactured ammunition.

INSTRUCTION MANUAL

BOLT ACTION RIMFIRE:

MARK I .22 S.L., L.R.

MARK II .22 L.R., H.M.2

93 .22 W.M.R., .17 H.M.R.

STRIKER .22 L.R., .22 W.M.R., .17 H.M.R, .17 H.M.2

IMPORTANT) DO NOT ATTEMPT TO LOAD AND SHOOT YOUR RIFLE UNTIL YOU HAVE THOROUGHLY READ THIS INSTRUCTION MANUAL AND ARE FULLY FAMILIAR WITH ITS CONFERTS

www.savagearms.com

Congratulations on joining the Savage Arms family of sporting frearms owners. With reasonable care, your frearm should deliver years of reliable service and perform to our "legend of accuracy"

For your convenience, this INSTRUCTION MANUAL has been divided into 8 sections.

SECTION 1: 10 Commandments of Shooting Safety

SECTION 2 Basic Functions

SECTION 3 Rings And Bases For Mounting A Scope

SECTION 4 Statement Of Limited Worranty

SECTION 5 MARK I Sense (Parts List and Diagram)

SECTION 6 MARK II Series (Parts List and Diagram)

SECTION / Model 93 Series (Parts List and Diagram)

SECTION 5 STRIKER Series (Parts List and Ologram)

PECTION *

10 COMMANDMENTS OF SHOOTING SAFETY

The following excerpts are from SAAMI bulletin #081 1MM Z/97 BP. The entire booklet can be obtained by calling: MATIONAL SHOOTING SPORTS FOUNDATION, 11 MILE HILL ROAD, NEWINGTON, CT 06470; 203-426-4358)

Firearms Safety Depends On You

From the time you pick up a firearm, you become part of a system over which you have complete control. You are the only part of the system that can make a gun safe – or unsafe.

You can help meet this responsibility by enrolling in hunter safety or shooter safety courses. If you have not already done so. You must constantly stress safety when handling linearms, especially to children and non-shooters. Develop safe shooting habits and remember finearms safety is up to you. Make no mistake about it.

ALCOHOL, DRUGS AND GUNS DON'T MIX

ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION

This is the most basic safety rule. If everyone handled a firearm so carefully that the muzzle never pointed at something they didn't intend to shoot, there would be virtually no firearm accidents. It's as simple as that, and it's up to you

Never point your gun at anything you do not intend to shoot. A safe direction means a direction in which a bullet cannot possibly strike anyone, taking into account possible neochets and the fact that bullets can penetrate waits and ceilings. Even when "dry firing" with an unloaded gun, you should never point the gun at an unintended target.

This is your responsibility, and only you can control it.

F REARMS SHOULD BE UNLOADED WHEN NOT ACTUALLY IN USE

Firearms should be loaded only when you are in the field or on the target range or shooting area, ready to shoot. When not in use firearms and ammunition should be secured in a safe place, separate from each other. It is your responsibility to prevent children and neither ammunition. A loaded gun has no place in or near a vehicle or building.

Whenever you handle a firearm or hand it to someone, always open the action immediately, and visually check the chember, receiver and magazine to be certain they do not contain any ammunition. Never assume a gun is unloaded – check for yourself! While in the field, there will be times when common sense and the basic rules of firearms safety will require you to unload your gun for maximum safety. When in doubt, unload your gun!

3 DON'T RELY ON YOUR GUN'S "SAFETY"

Treat every gun as though it can fire at any time, regardless of pressure on the trigger. The "safety" on any gun is a mechanical device which like any such device, can become

inoperable at the worst possible time. The safety serves as a supplement to proper gun handling but cannot possibly serve as a substitute for common sense.

Never touch the trigger on a firearm until you actually intend to shoot.

Your firearm is a precision instrument.

Regardless of the position of the safety, any bump strong enough to actuate the firing mechanism of a gun can cause it to fire. The only time you can be absolutely certain that a gun cannot fire is when the action is open and it is completely empty. You and the safe gun handling procedures you have learned are your gun's primary safeties.

4. BE SURE OF YOUR TARGET AND WHAT'S BEYOND IT

No one can call a bullet back. Don't shoot unless you know exactly what your bullet is going to strike. Be sure that your bullet will not injure anyone or anything beyond your target. You should keep in mind how far a bullet will travel if it misses your intended target or recochets in another direction.

Be aware that even a 22 short bullet can travel over 11, males and a high velocity carrindge, such as a 30-06 can project a bullet more than 3 miles. Shotgun pellets can travel 500 yards, and shotgun slugs have a range of over a half-mile.

5. USE CORRECT AMMUNITION

You must assume the senous responsibility of using only the correct ammunition for your frearm. Read and heed all warnings, including those that appear in the gun's instruction manual and on the ammunition boxes. Using improper or incorrect ammunition can destroy a gun and cause senous personal injury. It only takes one carthdge of improper caliber or gauge to whick your gun, and only a second to check each one as you load it. Be absolutely certain that the ammunition you are using matches the specifications that are contained within the gun's instruction manual and the manufacturer's markings on the frearm barrel.

Hand loaded or reloaded ammunition deviating from pressures generated by factory loads or from competent recommendations specified in reputable hand loading manuals can be dangerous, and can cause severe damage to gurs and senous injury to the shooter.

Ammunition that has become very wat or has been submerged in water should be discarded in a safe manner. Do not spray oil or solvents on ammunition or place ammunition in excessively lubricated freatms.

Form the habit of examining every cartridge you put in your gun. Never use damaged, old or questionable ammunition – the money you save is not worth the risk of possible injury or a named gun.

MARNING

PODRLY DISCHARGING FIREARMS VENTILATED AREAS, CLEANING FIREARMS OR HANDLING AMMUNITION MAY RESULT IN EXPOSURE TO OTHER SUBSTANCES KNOWN TO 自身7月 AND DEFECTS REPRODUCTIVE HAVE OTHER SERIOUS PHYSICAL INJURY ADEQUATE VENTILATION AT ALL TIMES HANDS THOROUGHLY EXPOSURE.

6 IF YOUR GUN FAILS TO FIRE WHEN THE TRIGGER IS PULLED, HANDLE WITH CARE!

Occasionally, a gun may not fire when the trigger is pulled. If this occurs, keep the muzzle pointed in a sale direction. Keep your face away from the breech. Then, carefully open the action, unload the firearm and dispose of the cartridge in a safe way.

Any time there is a carridge in the chamber, your gun is loaded and ready to fire – even if you've tried to shoot and it did not go off. It could go off at any time, so you must always remember RULE #1 and WATCH THAT MUZZLE!

SAFETY

The safety is located on the right side of the receiver on right hand guns, and on the left side of the receiver on left hand guns and the Striker Series.

 To put ON SAFE, pull rearward on the safety lever to fully expose the "S". See FIGURE 1.



Right hand model shown

To take OFF SAFE, push the safety lever forward to cover the "S" and fully expose the red dot. See FIGURE 2.



(Right hand model shown)

CAUTION

WHEN CARRYING A LOADED FIREARM, THE SAFETY MUST ALWAYS BE IN THE ON SAFE POSITION.

THE ONLY TIME YOU CAN BE ABSOLUTELY CERTAIN THAT A GUN CANNOT FIRE IS WHEN THE ACTION IS OPEN AND IT IS COMPLETELY EMPTY OF AMMUNITION.

LOADING

FIREARMS SHOULD BE LOADED ONLY WHEN YOU ARE IN THE FIELD. ON THE TARGET RANGE, OR AT A SHOOTING AREA READY TO SHOOT

ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION

USE ONLY THE CORRECT AMMUNITION THAT IS STAMPED ON THE SIDE OF THE BARREL

LOOK THROUGH AND THOROUGHLY CLEAN THE INSIDE OF THE BARREL AND CHAMBER TO ASSURE THERE ARE NO POSSIBLE OBSTRUCTIONS PRIOR TO LOADING

SAVAGE ARMS, (CANADA) INC. DISCLAIMS ANY RESPONSIBILITY FOR DAMAGE OR INJURY WHICH RESULTS FROM THE USE OF OTHER THAN FACTORY MANUFACTURED AMMUNITION.

LOADING - REMOVABLE MAGAZINE ICLIP

- With the muzzle of the firearm pointed in a safe direction, move the safety fully rearward to the ON SAFE position.
- Placing one hand over the ejection port, slowly left the bolt handle up and pull fully rearward to extract the five cartridge from the chamber of there is one.
- With one hand prepared to calch the removable magazine, pull the latch at the rear of the magazine, ejecting the magazine into your hand. See FIGURE 3.

SAFETY

The safety is located on the right side of the receiver on right hand guns, and on the left side of the receiver on left hand guns and the Striker Series.

 To put ON SAFE, pull rearward on the safety lever to fully expose the "S". See FIGURE 1.



Right hand model shown

To take OFF SAFE, push the safety lever forward to cover the "S" and fully expose the red dot. See FIGURE 2.



(Right hand model shown)

CAUTION

WHEN CARRYING A LOADED FIREARM, THE SAFETY MUST ALWAYS BE IN THE ON SAFE POSITION.

THE ONLY TIME YOU CAN BE ABSOLUTELY CERTAIN THAT A GUN CANNOT FIRE IS WHEN THE ACTION IS OPEN AND IT IS COMPLETELY EMPTY OF AMMUNITION.

LOADING

FIREARMS SHOULD BE LOADED ONLY WHEN YOU ARE IN THE FIELD. ON THE TARGET RANGE, OR AT A SHOOTING AREA READY TO SHOOT

ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION

USE ONLY THE CORRECT AMMUNITION THAT IS STAMPED ON THE SIDE OF THE BARREL

LOOK THROUGH AND THOROUGHLY CLEAN THE INSIDE OF THE BARREL AND CHAMBER TO ASSURE THERE ARE NO POSSIBLE OBSTRUCTIONS PRIOR TO LOADING

SAVAGE ARMS, (CANADA) INC. DISCLAIMS ANY RESPONSIBILITY FOR DAMAGE OR INJURY WHICH RESULTS FROM THE USE OF OTHER THAN FACTORY MANUFACTURED AMMUNITION.

LOADING - REMOVABLE MAGAZINE ICLIP

- With the muzzle of the firearm pointed in a safe direction, move the safety fully rearward to the ON SAFE position.
- Placing one hand over the ejection port, slowly left the bolt handle up and pull fully rearward to extract the five cartridge from the chamber of there is one.
- With one hand prepared to calch the removable magazine, pull the latch at the rear of the magazine, ejecting the magazine into your hand. See FIGURE 3.



MARK I shown

- Look and feet to be sure there are no cartridges in the chamber.
- As shown in FIGURE 4, load the correct caliber carridges into the removable magazine by pressing downward and to the man.




22LP 10 shot magazine shows

- Insert the removable magazine back into the stock opening, pressing upward until the tatch snaps into position and is fully engaged.
- Moving the bolt handle forward and down will push the first carthoge from the magazine into the chamber
 - When the bolt is fully closed, a live cartridge will be IN THE CHAMBER.

ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION

LOADING - SINGLE SHOT

- Move the safety fully rearward to the ON SAFE position, locking the trigger mechanism.
- 2. Lift the bolt handle up and fully rearward.
- Insert a cartridge into the chamber as shown in FIGURE 5.



MARK (shown)

- 4. Move the bolt handle forward and down.
 - When the bott is fully closed, a live carridge will be IN THE CHAMBER.

ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION

TO FIRE

DO NOT MOVE THE SAFETY FORWARD TO THE OFF SAFE [READY TO FIRE] POSITION UNTIL YOU ARE READY TO SHOOT.

 Keep your finger off the Ingger and out of the trigger guard until you are ready to shoot

THE ONLY TIME YOU CAN BE ABSOLUTELY CERTAIN THAT A GUN CANNOT FIRE IS WHEN THE ACTION IS OPEN AND IT IS COMPLETELY EMPTY OF AMMUNITION.

- Always look carefully around to be sure that no one will cross in front of you when you are ready to shoot.
- Place the firearm in shooting position and move the safety forward to the OFF SAFE [READY TO FIRE] position and take aim.

NEVER TOUCH THE TRIGGER ON A FIREARM UNTIL YOU ACTUALLY INTEND TO SHOOT.

NEVER POINT YOUR GUN AT ANYTHING YOU DO NOT INTEND TO SHOOT

 Place your incoming the trigger guard and when you are on target, squeeze the trigger slowly.

NO ONE CAN CALL A BULLET BACK III

CAUTION

SHOULD YOU NOTICE WHAT APPEARS TO BE GAS PRESSURE/RESIDUAL POWDER COMING FROM THE BOLT AREA, THIS MAY BE WHAT IS KNOWN AS BLOW BACK ALTHOUGH WEARING SAFETY GLASSES WILL PROTECT YOUR EYES, WE RECOMMEND TRYING A DIFFERENT BRAND OF AMMUNITION IN ORDER TO CORRECT THE SITUATION. SHOULD YOU STILL BE EXPERIENCING THIS CONDITION, OR OTHER OPERATING DIFFICULTY, PLEASE CONTACT OUR SERVICE DEPARTMENT AT 413-568-7001.

Pull up and fully rearward on the bolt handle to open the bolt to extract the fired case.

ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION.

- Moving the bott handle forward and down will push the next cartridge from the magazine and the chamber.
- Move the safety fully rearward to the ON SAFE position when not fixing.

UNLOADING - REMOVABLE MAGAZINE (CLIP)

 With the muzzle pointed in a safe direction, move the safety fully rearward to the ON SAFE position.

KEEP YOUR FINGERS AWAY FROM THE TRIGGER

- Placing one hand over the ejection port, slowly
 lift the bolt handle up and pull fully rearward to
 entract the live cartridge from the chamber if
 there is one.
- With one hand prepared to catch the removable magazine, pull the latch at the rear of the magazine, ejecting the magazine into your hand.

A LOADED GUN HAS NO PLACE IN OR NEAR A VEHICLE OR BUILDING

CAUTION

LOOK AND FEEL! BE SURE THE CHAMBER AND MAGAZINE ARE COMPLETELY EMPTY — DO NOT ASSUME!

UNLOADING - SINGLE SHOT

With the muzzle pointed in a safe direction.
 move the safety fully rearward to the ON SAFE position.

KEEP YOUR FINGERS AWAY FROM THE TRIGGER

- Placing one hand over the ejection port. slowly lift the boil handle up and pull fully rearward to extract the five cartridge from the chamber.
- 3. Remove the cartridge with your lingers.

A LOADED GUN HAS NO PLACE IN OR NEAR A VEHICLE OR BUILDING.

CAUTION

LOOK AND FEEL! BE SURE THE CHAMBER IS EMPTY DO NOT ASSUME!

CLEANING AND CARE OF YOUR FIREARM


YOUR GUN IS A MECHANICAL DEVICE THAT WILL NOT LAST FOREVER AND IS SUBJECT TO WEAR.

TO REMOVE THE BOLT

ALWAYS KEEP THE MUZZLE POINTED IN A SAFE DIRECTION

A LOADED GUN HAS NO PLACE IN OR NEAR A VEHICLE OR BUILDING

- Placing one hand over the ejection port, slowly
 lift the bolt handle up and pull fully rearward to
 extract the live cartridge from the chamber (if
 there is one).
- With one hand prepared to catch the removable magazine, pull the latch at the rear of the magazine, ejecting the magazine into your hand.
- Look and feel to be sure there are no carbridges in the chamber.
- 4 Move the safety forward to the OFF SAFE [READY TO FIRE] position.
- 5 Pull back on the trigger and slide the bolt out of the rear of the receiver. See FIGURE 6.



MARK shown

Care should be taken not to hit the stock with the bolt.

DO NOT DISASSEMBLE THE BOLT ASSEMBLY.

CAUTION

BOLT ASSEMBLIES ARE SPECIFICALLY MATCHED TO A FIREARM. USING ANY OTHER BOLT ASSEMBLY MAY CAUSE EXTENSIVE DAMAGE TO THE FIREARM AND/OR SERIOUS INJURY TO THE SHOOTER OR BYSTANDER.

DISASSEMBLE ONLY ONE FIREARM AT A TIME TO AVOID INTERCHANGING COMPONENTS

CLEANING THE BORE

LOOK AND FEEL! BE SURE THE CHAMBER AND MAGAZINE ARE COMPLETELY EMPTY DO NOT ASSUME!!!

NEVER ATTEMPT TO DISASSEMBLE, CLEAN, OR OIL A LOADED FIREARM!

BE SURE TO READ AND UNDERSTAND ALL
OF THE CAUTIONS AND WARNINGS ON ALL
SOLVENTS AND CHEMICALS PRIOR TO USE.
FOLLOW THE MANUFACTURER'S
INSTRUCTIONS FOR BEST CLEANING
RESULTS.

- Prepare an area for cleaning the firearm with a suitable surface, adequate ventilation, and the correct caliber cleaning rod, brush, patches, powder solvent, and oil.
- Follow the instructions under "TO REMOVE THE BOLT" (see page 7) before cleaning.
- Lay the firearm horizontally with the ejection port facing down.

ALWAYS STARTING FROM THE CHAMBER END. PUSH THE CLEANING ROD THROUGH THE BORE AND OUT THE MUZZLE END.

 Using a small amount of powder solvent on the brush, push the cleaning rod through the barrel several times.

- Unscrew the brush from the cleaning rod and replace it with a patch tip.
- Push a new patch through the bore starting from the chamber end and out the muzzle.
- Repeat step 6 several times.
- Push a new patch lightly saturated with gun oil through the bore
- Push a new dry patch through the bore to remove the excess oil.

A VERY THIN FILM OF OIL IS SUFFICIENT PROTECTION — DO NOT OVER OIL!!!

YOUR GUN IS A MECHANICAL DEVICE THAT WILL NOT LAST FOREVER AND IS SUBJECT TO WEAR. CONTACT SAVAGE ARMS SERVICE DEPARTMENT FOR PERIODIC INSPECTION, ADJUSTMENT AND SERVICE

PROTECTING METAL SURFACES

- In order to be able to reach all surfaces remove the bolt prior to cleaning and oning.
- With a soft cloth, remove any foreign matter (i.e. mod. (wigs, grass).

- Apply a thin coat of gun oil on all cleaned metal surfaces. Rubbing may be necessary to remove any signs of rust.
- Where accessible, clean and lightly oil interior metal surfaces

TO REPLACE BOLT

 Make sure that the magazine is removed, the safety is in the OFF SAFE [READY TO FIRE] position, and the boit is in the cocked position (the guide pin aligned with the boit arm, see FIGURE 7).



- 2 Hold the bolt so the fring pin is located top center. With the togger pulled, side the bolt into the rear of the receiver.
 - If you encounter difficulty, remove the bolt and re-check the alignment. Never force the bolt into the receiver.

SECTION 3

RINGS & BASES FOR MOUNTING A SCOPE

The following companies manufacture RINGS and BASES that fit Savage firearms.

The manufacturers listed below should be contacted for specific part numbers and information.

WSA ISB FO Box 39 Chalaska Wh 54650 MUHAO-7406 Emil Motion (2005) 500	Burris 331 Earl St Street Groewy, CO 65631 970-356-1670 when burrisoptics.com
KWW.SITE 5555 Treadwoll Wayne M. 45164 734-326-1500 www.kwisiteco@izol.com	MULETT 7275 Multdy Circle Humbington Bearch CA 92847 803-545-5397 Hywe miletin ghts com
8-50 ARS FO Box 11251 Fort Worth TX 76110 100-435-2505 axx 3-1346-6-357	LEU POLD 14403 NW Greenbrier Parkway Beavenbri, OR 97006 503-506-5195 www.guboks.com

SECTION 4

STATEMENT OF LIMITED WARRANTY

Please complete the WARRANTY
REGISTRATION CARD and return it to Savage
Arms, Inc. within ten (10) days from the data of purchase

Savage Arms, Inc. must be notified within one (1) year from the date of purchase of any defect in materials or workmanship encountered during normal use.

WHO IS COVERED?

The original owner (with proof of purchase)

WHAT IS COVERED?

Any delect in materials or workmanship performed at Savage Arms.

HOW LONG IS THE WARRANTY PERIOD?

One (1) year from the date of purchase.

WHAT IS NOT COVERED?

PERSONAL INJURY PROPERTY DAMAGE AND/OR DAMAGE TO THE FIREARM CAUSED BY.

 Negligence to provide proper care and maintenance.

- A terations modifications performed without the expressed authorization of Savage Arms, Inc. Service Department.
- · Normal wear; tear; and/or corrosion.
- Accidental discharge, careless handling, and or misuse
- Barrel obstructions.

EXCLUSIONS AND LIMITATIONS:

This WARRANTY and the remedies set forth herein are exclusive and take the place of all other expressed or implied WARRANTIES [including any implied WARRANTY of merchantability or fitness for any particular purpose which are disclaimed). No other representations or claims of any nature shall be binding on or obligate Savage Arms, Inc.

Savage Arms, Inc. elicities any incidental and consequential damages under this warranty. Some states do not allow exclusions or limitations on how long an implied warranty tasts, so the above limitations may not apply to you.

This WARRANTY gives you specific legal rights. You may have other rights, which will vary, from state to state.

RETURNING A FIREARM:

For WARRANTY claims, proof of purchase must accompany the firearm.

It is a violation of Federal Law to ship a firearm with live argumunition either in the box or in the firearm itself. If received, The Sureau of Alcohol, Tobacco, and Firearms must be notified!

Savage Arms, Inc. is not responsible for the loss or damage to any accessories shipped with the firearm.

If there is a question whether the firearm should be returned or parts could be purchased, please call 1-413-568-7001 between 9:00 am and 3:30 p.m. EST and ask for the Service/Warranty Department.

All frearms are to be sent to Savage Arms, Inc. at the owner's expense. Warranty repairs will be returned to the owner at the expense of Savage Arms, Inc.

- Pack the fream in its original box if possible for a similar suitable box), being careful to include any support pieces.
- 2. Enciose a brief note including
 - Name, address and phone number of sender.

- Best time and method to contact sender
- · Senal number of firearm.
- Description of the problem you are having.
- Bullet weight, bullet type, sabot, powder type and charge you are using
- Any other information that you feel may be helpful
- 1 Return to

Savage Arms, Inc. 100 Springdate Road Vestfield MA 01085 Afth Service impartment Phone 413-568-780 Fax 413-568-8386

- If there will be a charge involved for the repair a quote will be sent within fourteen (14) working days
 - If there is no response from the quote
 with the second second in the second second in the second s
 - Firearms will be repaired typically 4 weeks after receipt of payment in the order they were received



OF SHALL SHALL

MARK | Series

PARTS MAY BE ORDERED DIRECTLY FROM SAVAGE ARMS [PHONE 413-568-7001] BETWEEN THE HOURS OF 9:00 AND 1 % EASTERN STANDARD TIME). THERE IS A MINIMUM ORDER AND PLEASE ALLOW 2 WEEKS FOR DELIVERY


PLEASE BE ADVISED THAT SOME PARTS
MAY REQUIRE FITTING SAVAGE ARMS
BEARS NO RESPONSIBILITY FOR THE
FUNCTION OR PERFORMANCE OF ANY
FIREARM THAT HAS BEEN REPAIRED OR
MODIFIED BY OTHER THAN SAVAGE ARMS
SERVICE DEPARTMENT AS SUCH SAVAGE
ARMS ACCEPTS NO RESPONSIBILITY
LIABILITY FOR ANY DIRECT AND/OR
CONSEQUENTIAL DAMAGE AND/OR INJURY
RESULTING FROM THE USE OF A FIREARM
THE SAVAGE ARMS SERVICE DEPARTMENT

Description



- *9 Proper guard
- Zó Thogar guardimag þlata 50'éw 2 regig
- 21 Subdivingsembly screw (2 racid)
- Barretrepelver assembly RH
 Barretrepelver assembly RH youth
 Barretrepelver assembly RH smooth bore
 Barretrepelver assembly LH

RESTRICTED TO FACTORY INSTAULATION ONLY.

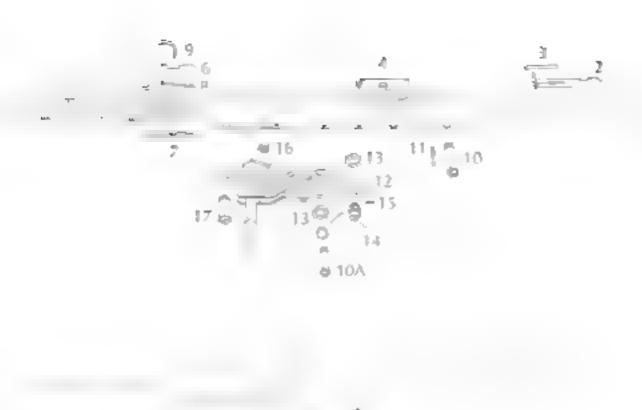

MARK

SECTION C


MARK II Series

PARTS MAY BE ORDERED DIRECTLY FROM SAVAGE ARMS (PHONE 413-568-7001) BETWEEN THE HOURS OF 9 00 AND 3 % EASTERN STANDARD TIME). THERE IS A MINIMUM ORDER AND PLEASE ALLOW 2 WEEKS FOR DELIVERY

PLEASE BE AD I SED THAT SOME PARTS
MAY REQUIRE FITTING SAVAGE ARMS
BEARS NO RESPONSIBILITY FOR THE
FUNCTION OR PERFORMANCE OF ANY
FIREARM THAT HAS BEEN REPAIRED OR
MODIFIED BY OTHER THAN SAVAGE ARMS
SERVICE DEPARTMENT AS SUCH SAVAGE
ARMS ACCEPTS NO RESPONSIBILITY
LIABILITY FOR ANY DIRECT AND/OR
CONSEQUENTIAL DAMAGE AND/OR INJURY
RESULTING FROM THE USE OF A FIREARY
REPAIRED OR MODIFIED BY OTHER THAN
THE SAVAGE ARMS SERVICE DEPARTMENT

^{*} RESTRIC ED TO FACTORY INSTALLATION CHLY



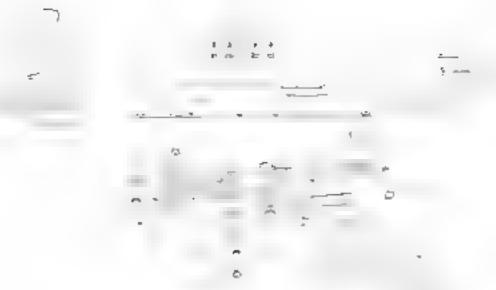

MARKII

SECTION


Made, 93 Series

PARTS MAY BE ORDERED DIRECTLY FROM SAVAGE ARMS [PHONE 413-568-7001] BETWEEN THE HOURS OF 9:00 AND 3:30 (EASTERN STANDARD TIME). THERE IS A MINIMUM ORDER AND PLEASE ALLOW 2 WEEKS FOR DELIVERY

PLEASE BE ADVISED THAT SOME PARTS
MAY REQUIRE FITTING SAVAGE ARMS
BEARS NO RESPONSIBILITY FOR THE
FUNCTION OR PERFORMANCE OF ANY
FIREARM THAT HAS BEEN REPAIRED OF
MODIFIED BY OTHER THAN SAVAGE ARMS
SERVICE DEPARTMENT AS SUCH SAVAGE
ARMS ACCEPTS NO RESPONSIBILITY
LIABILITY FOR ANY DIRECT AND/OR
CONSEQUENTIAL DAMAGE AND/OR INJURY
RESULTING FROM THE USE OF A FIREARM
REPAIRED OR MODIFIED BY OTHER THAT.
THE SAVAGE ARMS SERVICE DEPARTMENT



^{*} RESIRCTED TO FACTORY INSTALLATION THEY

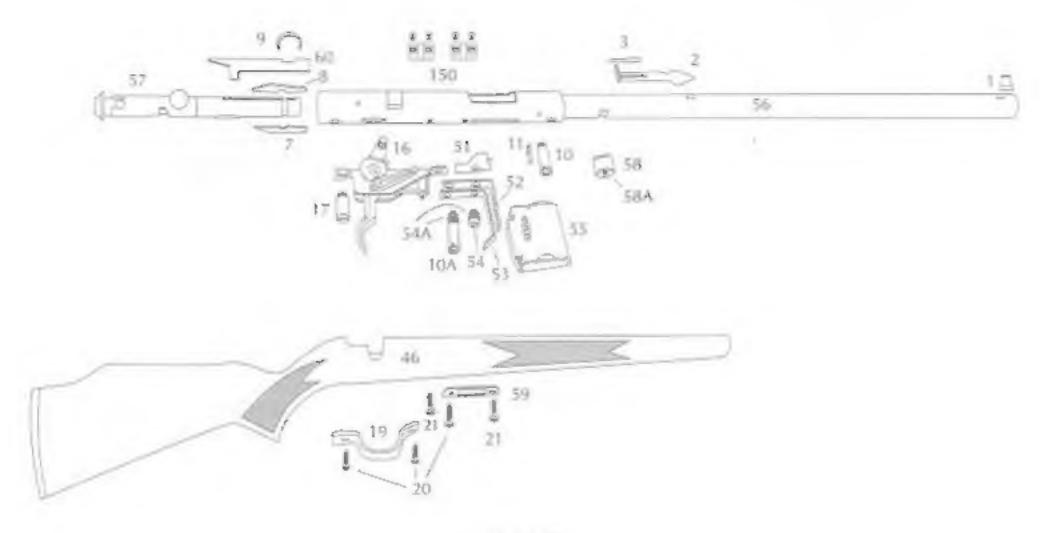

Model 93

GEOTION 1

STRIKER Series

PARTS MAY BE ORDERED DIRECTLY FROM SAVAGE ARMS [PHONE 413-568-7001] BETWEEN THE HOURS OF 9:00 AND 3:30 (EASTERN STANDARD TIME). THERE IS A MINIMUM ORDER AND PLEASE ALLOW 2 WEEKS FOR DELIVERY.

PLEASE BE ADVISED THAT SOME PARTS
MAY REQUIRE FITTING. SAVAGE ARMS
BEARS NO RESPONSIBILITY FOR THE
FUNCTION OR PERFORMANCE OF ANY
FIREARM THAT HAS BEEN REPAIRED OR
MODIFIED BY OTHER THAN SAVAGE ARMS
SERVICE DEPARTMENT. AS SUCH. SAVAGE
ARMS ACCEPTS NO RESPONSIBILITY!
LIABILITY FOR ANY DIRECT AND/OR
CONSEQUENTIAL DAMAGE AND/OR INJURY
RESULTING FROM THE USE OF A FIREARM
REPAIRED OR MODIFIED BY OTHER THAN
THE SAVAGE ARMS SERVICE DEPARTMENT

Description

MODELS 501, 502 & 503

- Stock assembly screw (2 recid)
- 2 Rear stud
- Extractor RH
- 4 Cartridge guide RH
- 5. Lock washer
- Scope base/screws (2 reg/d) Scope base/screws SS (2 reg/d)
- 7 Stock assembly stud.
- Trigger assembly LH Trigger assembly LH SS
- 9 Stock synthetic 22LR Stock synthetic 22WMR 17HMR
- 10 Extractor spring dig.
- *29 Barrelireceiver assembly 22LR Barrelireceiver assembly 22WMR Barrelireceiver assembly 17HMR Barrelireceiver assembly 17HMR SS
- 52 Front stud


MODEL 501 22LR

- 22 Macazine housing
- 23 Magazine awsembly
- 24 Magazine returning spring
- 25 Trigger/mag housing scraw
- 26 Bolt guide RH
- 27 Firing pin
- 28 Spacer washer
- "30 Bolt assembly 22LR

MODEL 502 .22WMR & 503 .17HMR

- 12 Recoil lug
- 124. Recoiling screw
- 13 Libar Libar SS
- Magazine assembly SS Magazine assembly SS
- Magazine retaining spring Magazine retaining spring SS
- 16 L'bar screw
- 17 Bolt guide RH
- 16 Firing pin
- 9 Soft assembly 22WMR, 17HMR
 Bott assembly 17HMR SS

^{*} RESTRICTED TO FACTORY INSTALLATION ONLY

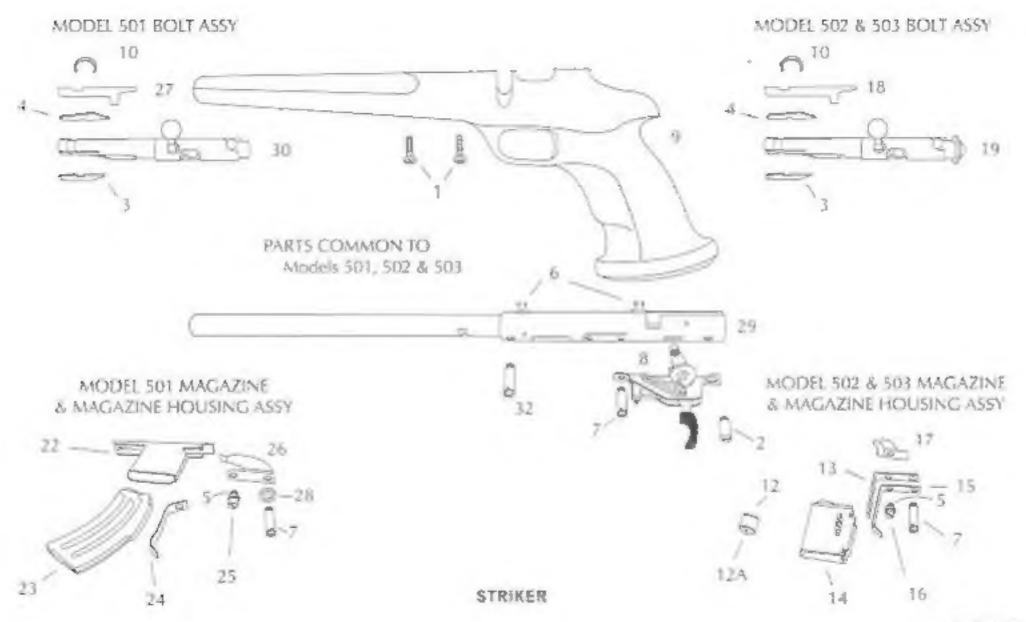



Children are attracted to and can operate firearms that can cause severe injury or death. Prevent child access by always keeping guns locked away and unloaded when not in use. If you keep a loaded firearm where a child obtains and improperly uses it, you may be fined or sent to prison.

ADVERTENCIA

A los niños los atraen las armás de fuego y las pueden hacer funcionar. Ellos pueden causarses lesiones graves y la muerte. Evite que los niños tengan acceso a las armás de fuego guardándolas siempre con llave y descargadas cuando no las esté utilizando. Si usted tiene un arma de fuego cargada en un lugar en que un niño tiene acceso a ella y la usa indebidamente, le pueden dar una multa o enviarlo a la carcel.



100 Springdale Road Westfield, Massachusetts USA 01085 248 Water Street P.O. Box 1240 Lakefield, Ontario CANADA KOL 2HO

153429 (11/04)

www.savagearms.com